



So hot, so quick!

Venus Water Heaters presents the Quik series, a range of tankless water heaters with the latest heat exchanger technology.



VENUS

Quik


VENUS

Quik

VENUS

Quik

Venus Quik Tankless water heaters are fitted with a unique advanced heat exchanger that ensures continuous hot water supply in an innovative way.

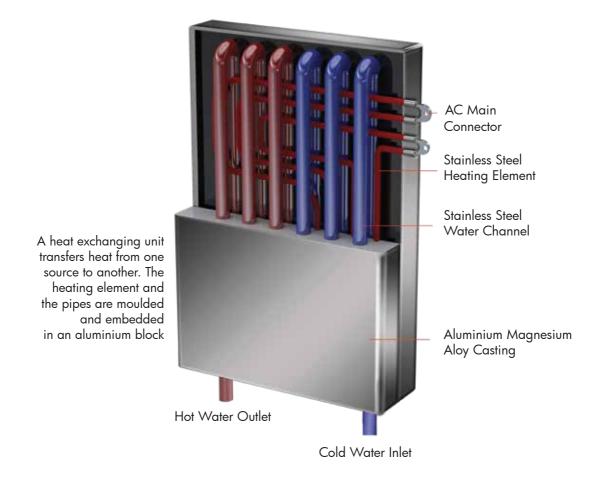

The water enters and circulates through the pipes and gets heated by the heating element using a quick transfer of heat through the aluminium block to the water in the pipes. This technology gives instantaneous water, without direct contact between the heating element and water. This in turn increases energy efficiency, lowers operating costs and ensures total safety. It avoids scale formation and recurring maintenance in hard water areas.



Super Fast Heating in Seconds | Safe separation of water and electricity | Long Life - Zero scale formation

Unique Features



Tankless Heat Exchanger Technology: The heating element and water pipe are molded together for quick transfer of heat from element to the water without contact. This ensures quick heating, long life and safety.



Microprocessor Control: System adjusts heating power output to maintain the set temperature even when the water flow rate is altered.



Wide Pressure Range (2 to 6 bar): Enjoy a better shower as it works both in low and high pressure conditions.



ABS Plastic Outer Body: Compact. Corrosion free. Shock proof



6 Bar Pressure: High working pressure suitable for connection to pressure pumps.



Flexi Mount: Flexible mounting options (Horizontal Model) Wall/Floor mounting. Left/right side opening options available ideal for modern apartments.



Designed for high usage and supply to multiple points - shower, kitchen, bath etc.



2 years guarantee on product





engineered to provide constant temperature output by controlling the power output.

Constant temperature output: Quik is

Overheat Protection: Super safe as it prevents the heat exchanger from over heating (i.e. more than 90°C)

Company Installation | Free Installation | Service Support



Quik Tankless instant 5.5 kW and 6.8 kW water heater with the latest Heat Exchanger technology and microprocessor based temperature control allows you to enjoy a super quick, hot shower. This innovative technology provides an endless supply of hot water whenever required.



Tankless Heat Exchanger Technology: The heating element and water pipe are molded together for quick transfer of heat from element to the water without contact. This ensures quick heating, long life and safety.



Microprocessor Control: System adjusts heating power output to maintain the set temperature even when the water flow rate is altered.



Wide Pressure Range (2 to 6 bar): Enjoy a better shower as it works both in low and high pressure conditions.



Digital Temperature Display: The set and actual temperature are prominently displayed.




Over heat Protection: Super safe as it prevents the heat exchanger from over heating (i.e. more than 90° C)



Constant temperature output: Quik is engineered to provide constant temperature output by controlling the power output.

Product Specification

Model		Q55	Q68			
Wattage		5500 W	6800 W			
Rated Voltage		220-240 V, 50Hz, AC				
Wiring Size	3 x 2.5mm²	3 x 4mm ²				
Required Rating of Circuit Breaker		32 amps	40 amps			
Rated Pressure		0.02 – 0.6 Mpa				
Safety Class		IP25				
Temp.Setting range		30°C - 55°C				
Rate of flow		1.8 - 10 L/min				
Temperature Raise (Δt) @	5 L/min	16°C	19°C			
	7 L/min	11°C	I4°C			
	10 L/min	8°C	10°C			
Dimensions (mm)		АхВхС				
		310 x 210 x 70				
*Specifications subject to change withc	ut prior notice	2.				





Quik Tankless instant (9kW) with a compact, space saving design, fitted with an advanced Heat Exchanger gives hot water on demand. Ideal for a super fast shower in the most energy efficient manner. This tankless technology helps achieve maximum energy efficiency as it operates only when hot water is needed.



Tankless Heat Exchanger Technology: The heating element and water pipe are molded together for quick transfer of heat from element to the water without contact. This ensures quick heating, long life and safety.



Feather Touch Operation : LED digital display of outlet temperature



Microprocessor Control: System adjusts heating power output to maintain the set temperature even when the water flow rate is altered.




Constant temperature output: Quik is engineered to provide constant temperature output by controlling the power output.



Built in Pressure Relief Valve to prevent pressure build up



ABS Case, Attractive, Semi Transparent



Model		
Wattage		
Rated Voltage		
Wiring Size		
Required Rating of Circuit Breaker		
Rated Pressure		
Safety Class		
Temp.Setting range		
Rate of flow		
5 L/min	26°C	
7 L/min	18°C	
10 L/min	13°C	
Dimensions (mm)		



Quik Tankless instant 12kW, 15kW, 18kW and 24kW water heater promises a super fast hot shower in a safe manner. Tankless water heaters work only when hot water is needed and therefore, there are no energy losses, providing efficient heating while conserving energy.



Tankless Heat Exchanger Technology: The heating element and water pipe are molded together for quick transfer of heat from element to the water without contact. This ensures quick heating, long life and safety.



3 Phase Model: 12kW, 15kW, 18kW & 24kW



Microprocessor Control: System adjusts heating power output to maintain the set temperature even when the water flow rate is altered.



Designed for high usage and supply to multiple points - shower, kitchen, bath etc.



Constant temperature output: Quik is engineered to provide constant temperature output by controlling the power output.




Digital Temperature display that shows energy & water consumption

Product Specification

*Specifications subject to change without prior notice.

Product Specification									
Model		Q123	Q153	Q183	Q243				
Wattage		12000W	15000₩	18000₩	24000W				
Rated Voltage		400 V, 50/60Hz, 3Phase, AC							
Wiring Size		4 x 2.5mm ²		4 x 4mm ²	4 x 6 mm ²				
Required Rating of Circuit Breaker		25 amps		32 amps	40 amps				
Rated Pressure			0.02-0.6	Mpa (6 bar)					
Safety Class	IP25								
Temp.Setting range		30°C – 60°C							
Rate of flow	1.8 - 12 L/min								
Temperature	7 L/min	25°C	31°C	37°C	49°C				
Raise (Δt) @	10 L/min	17°C	21°C	26°C	34°C				
	12 L/min	14°C	18°C	21°C	29°C				
Dimensions (mm)		A x B x C 385 x 260 x 90							



A SERVICE THAT'S FULL OF WARMTH

Venus designs its products to meet demanding national and international standards. You can be sure that this drive for quality is matched by the customer satisfaction record that our after sales service strives for. "Service within 24 hours" is the promise of our committed service personnel. With more than 250+ service centers throughout the country, prompt, economical and reliable service will reach you, wherever you are.



Call Customer Care © 08144666999 © +91-9884064999

VENUS HOME APPLIANCES (P) LTD. REGISTERED OFFICE & FACTORY:

5/54-A, Senthilampannai, Tuticorin - 628 103. Tuticorin District, Tamil Nadu. Ph: 0461-2271 891, Fax: 0461-2271 890

CENTRAL MARKETING OFFICE:

4/993, Kamaraj Street, Rajiv Gandhi Salai (OMR), Kottivakkam, Perungudi Post, Chennai - 600 096. Ph: 044 - 4340 1515 Customer care: 08144666999 | Whatsapp: 09884064999 Email: customercare@venushomeappliances.com Website: www.venushomeappliances.com



