

VENUS

BrizoPlus

Wake Up to Warmth

OVENUS

Splash

6

VENUS

O Splash

VENUS

Vectre

OVENUS

(2) Lava

.

OVENUS

1

sedrà

ABOUT VENUS

VENUS HOME APPLIANCES (P) LTD., manufacturers of Venus Water Heaters for 60 years is a market leader and pioneer in the Water Heater industry. Venus is one of the leading brands of water heaters in India and stands for Quality, Reliability and Performance.

Appliances that provide a continual supply of hot water are called water heaters or Electric geysers. Venus Home Appliances is the leading manufacturer of water heaters and geysers in India. Venus has been providing a wide range of water heaters in India that include electric instant water heaters, electric storage water heaters, solar water heaters and heat pump water heaters. Venus Home Appliances strives to design, manufacture, supply water heaters and accessories to national/international standards. Venus has got ISO 9001 certification from BVQI and is ISO14001:2004 and BS OHSAS 18001:2007 certified; a measure of its commitment to quality.

LARGEST EXPORTER

VENUS HOME APPLIANCES (P) LTD., manufacturers of Venus Water Heaters for 60 years is a market leader and pioneer in the Water Heater industry. Venus is one of the leading brands of water heaters in India and stands for Quality, Reliability and Performance. Venus water heaters have sleek exteriors that complement the performance.

With a Presence in more than 22 countries across the World, Venus Home Appliances is the No.1 in Exports with reference to the Water heater Industry.



*Based on customs data

NATIONAL & INTERNATIONAL CERTIFICATION



Winner of the 'National Award for Quality Product' in 2000 by Govt. of India





Twice winner of the 'Tamil Nadu Quality Award'





CB SCHEME

60 years market leader and a pioneer in the water heater industry



Certification from BVC







Enameling Process- Hi-Tech Plant

Porcelain Enamel Glass lined tanks are produced in a world-class fully automated plant in Venus using the best raw materials and the highest quality


assurance practices.




Stage I - FORMING: Deep drawing of I.8-2mm steel blanks to form lids in a heavy duty Hydraulic Press.



Stage 2 - WELDING: Welding of lids and shells in an automatic,Plasma/MIG Welding Line. All welded tanks are tested immediately at 3 bars pressure; 100% leakage free.



Stage 3 - **PRE-TREATMENT:** Inner surface of the tank is blasted at high pressure in the shot blasting machine to remove any surface impurities and oxides.



Stage 4 - ENAMEL APPLICATION:

Dry Powder Enamel is sprayed on the tanks by 2 robots. Automatic controls maintain a homogeneous coating thickness of 250µ across the surface of the tank.



Enamel coated tanks are fired inside the high temperature furnace at 830° C - 850° C. The enamel melts to fuse and bond with the steel to form a protective glass lining.

UNIQUE FEATURES

DURABILITY

Porcelain Enamel Glass Lined Tank



Full face Gasket with Neck Protection

30% larger anode for longer Protection

Zn-Ni coated fasteners 5X Rust Resistance



Double side enameling prevents rusting of flange and door plate

PERFORMANCE



tank from rust and corrosion. 100% pure copper tank: For long life and

Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the

Glass lined Incoloy 800 element: Withstands temperatures up to 1000°C Long lasting even in hard water reduces scale formation. Prevents premature element failure.


corrosion free performance.

Glasslined Double Ceramic Heating Elements: Shock-proof, hard water proof and long-lasting.



Hard water protection: Low density, Glasslined elements for long life in hard water areas.







double that of ordinary Instant water heaters. Flexi Mount: Flexible mounting options (Horizontal Model) Wall/Floor mounting. Left/right side opening options available - Ideal for modern apartments.

6 bar pressure: High Working pressure that is

SAFETY



Multi-function valve: Acts as pressure release valve, non-return valve, drain valve, expansion valve and vacuum release valve.



Sacrificial Magnesium Anode: A special device to enhance the corrosion protection of the tank by means of "Cathodic action".

Triple Safety : Multi-function Safety Valve, Capillary Thermostat & Thermal cutout.



3

IPX4 : Resistant to water splashes from any direction.

ENERGY SAVINGS

5 Star rating for more energy savings.



.....

3cm Thick Polyurethane Foam (PUF) insulation: Reduces heat loss and keeps water hot for much longer.

Power meter: To show actual energy consumption for daily, weekly, monthly, and Annually.

DIGITAL



IoT Empowered : W/H Operation from across the World



Wi-Fi - Enabled : Lets you Set, Schedule & view at your convenience



Smart Modes: Three Energy Saving Smart Shower Modes



Digital Display: For visual indication of temperature.



Multi-function Display: For visual indication of temperature and program options.



Temperature Display : The display will show the real time temperature.

ENDURANCE



10 Years* Guarantee: On Copper tank and Porcelain Enamel glass lined tank (Splash Pro Smart and Splash Pro IoT Models only)



7 Years** Guarantee: On Porcelain Enamel GlassLined Tank



4 Years*** Guarantee: On Heating Element

5-Anti Corrosion Features

Ultimate Durability - Splash pro is designed for durability. With innovative anticorrosion features and hard water protection splash pro is the best among water heaters. Splash pro is built to last for years.



Types of Heating Element

We use different types of heating elements in our water heaters. Which ensures hard water protection and shock protection. They are designed for reliable & energy efficient performance in all types of water conditions. We have higher grade heating elements for hard water areas to resist scale deposits & premature failure. There are 3 types of heating elements : I. Ceramic Heating element, 2. Glass lined incoloy element, 3. Copper Heating element.




Glass lined Incoloy Heating Element



Scale Guard Technology



In Ceramic heating element, heat is transferred over a much larger surface area, which reduces the stress on heating element, lowers watts density/sq.cm and ensures less scale deposition on the heating element.

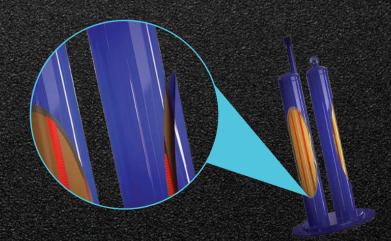


WARMTH FOR LIFE


Venus water heaters are built with state-of-the-art technology and comes equipped with the most innovative features.

- Storage Water Heaters
- Instant Water Heaters
- Tankless Water Heaters
- Solar and Heat Pump Water Heaters



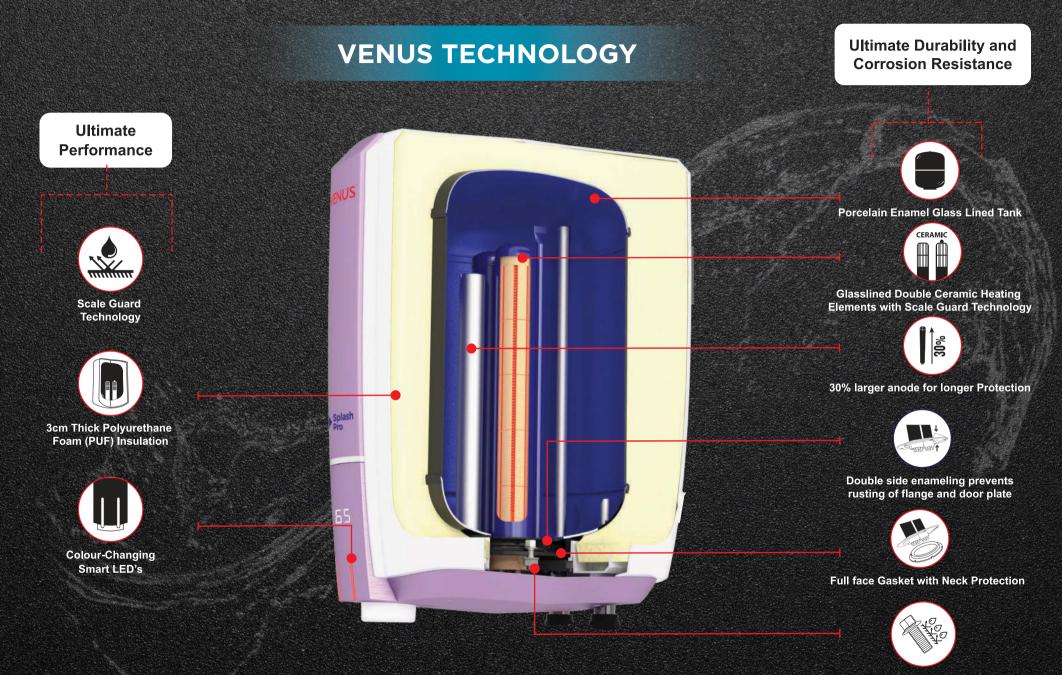

Zn-Ni coated fasteners 5X Rust Resistance

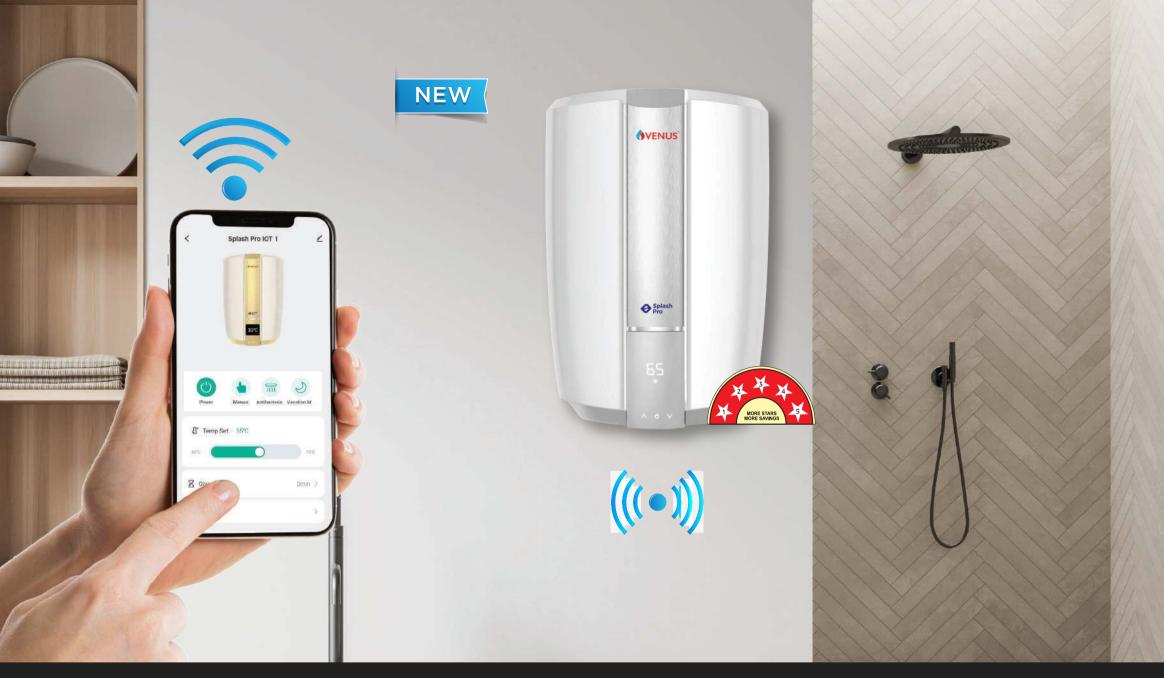

Splash Pro IoT



Graphite Silver

Splash Pro IOT

Embrace the incredible potential of Splash Pro IoT-enabled water heaters to elevate your home's comfort, convenience, and energy efficiency. The smart home revolution has arrived, and with Splash Pro IoT water heater, you can be at the forefront of this exciting transformation. Whether you're seeking convenience, savings, or a greener lifestyle, our Splash IoT water heater your gateway to a future of intelligent, connected living. Embrace the IoT revolution today.



IoT Enabled: Operation the water heater from across the world



Antibacterial Mode: High temperature settings to prevent the growth of harmful bacteria like Legionella





Wi-Fi Enabled: Set , Schedule & View at your convenience



Mobile Application control : One mobile device can control many heaters. Multi -user can control one heater



Smart mode: Energy saving mode with water temperature @ 45° C



App sharing: One Tap to share devices among family members



Timer: A suitable time and day can be set for the Heater to turn on and off.

Vacation Mode: Safety feature for customers while leaving the house.



Hard Water Protection



Anticorrosion Features



Guarantee on inner tank


Model	Wattage	Capacity	Time to Raise	Dime	nensions (in mm)	
	-	in Litres	Temp by 35°C	Α		-
			Vertical	А	В	С
I5SW	2000	15	20min	488	326	375
25SW	2000	25	33min	545	386	433
D . 1D	01 (0)	(2 0	0m water head)			

*Specifications subject to change without prior notice.








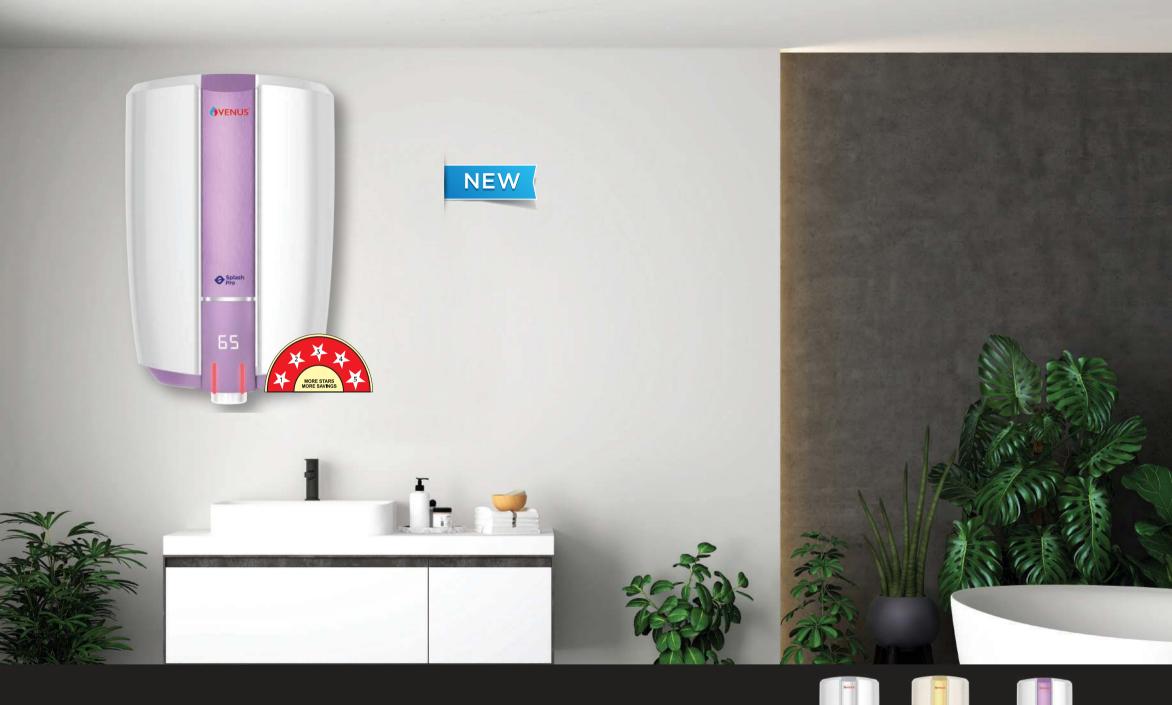


Splash Pro Smart



Purple Haze


Splash Pro Smart

Introducing "Splash Pro Smart" the smart upgrade of splash pro water heater from venus with elegant central panel design and brushed finish with a collection of delighting colors, Splash pro smart has a convenient digital display to exacity know the temperature of the hot water for a comfortable bath.

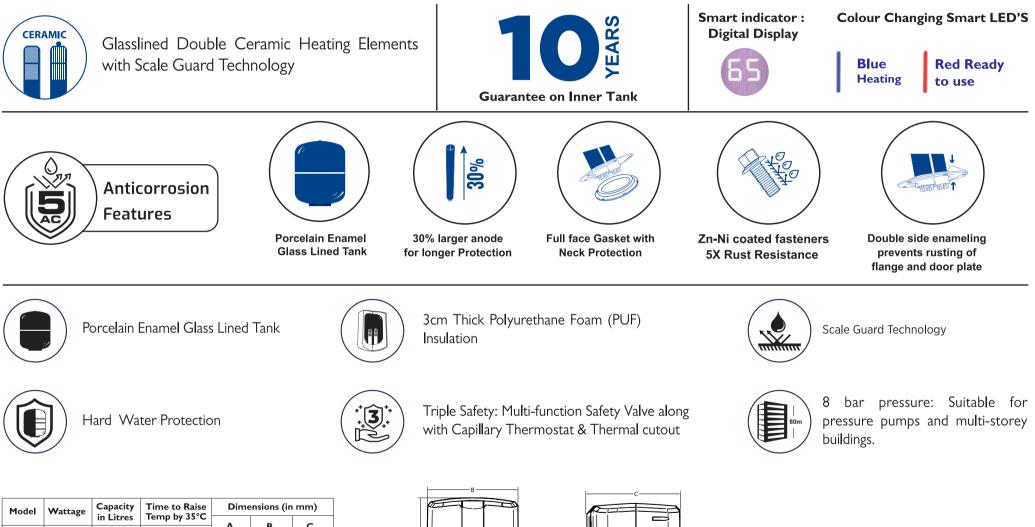

Model	Wattage	Capacity	Time to Raise	Dime	Dimensions (in mm)		
	-	in Litres	Temp by 35°C	Α	в	с	
			Vertical	~	D	C	
IOSX	2000	10	13min	368	326	375	
I5SX	2000	15	20min	488	326	375	
25SX	2000	25	33min	545	386	433	
Rated Pres	Rated Pressure: 8 bars (8kg/cm ² ; max, 80m water head)						

*Specifications subject to change without prior notice.









Splash Pro





Graphite Silver

Purple Haze

Splash Pro

Introducing "Splash Pro" the smart upgrade of Splash Pro water heater from Venus with elegant central panel design and brushed finish with a collection of delighting colors.



Glasslined Double Ceramic Heating Elements with Scale Guard Technology

Porcelain Enamel

Glass Lined Tank





Anticorrosion



30% larger anode for longer Protection



Neck Protection

Zn-Ni coated fasteners **5X Rust Resistance**



Red

Ready to use

Double side enameling prevents rusting of flange and door plate



Porcelain Enamel Glass Lined Tank



3cm Thick Polyurethane Foam (PUF) Insulation



Copper Heating Element (6SB models Only)



Hard Water Protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Model	Wattage	Capacity	Time to Raise	Dimensions (in mm)		mm)	
		in Litres	Temp by 35°C	Α	в	с	
			Vertical	~	D		
06SB	3000	06	06min	298	336	340	
IOSB	2000	10	I3min	368	326	375	
Rated Pres	Rated Pressure: 8 bars (8kg/cm ² ; max, 80m water head)						

*Specifications subject to change without prior notice.


*6 Ltr Image is different look, *Copper Heating Element in 6SB Model







* 2 Years Guarantee on Copper Heating Element.

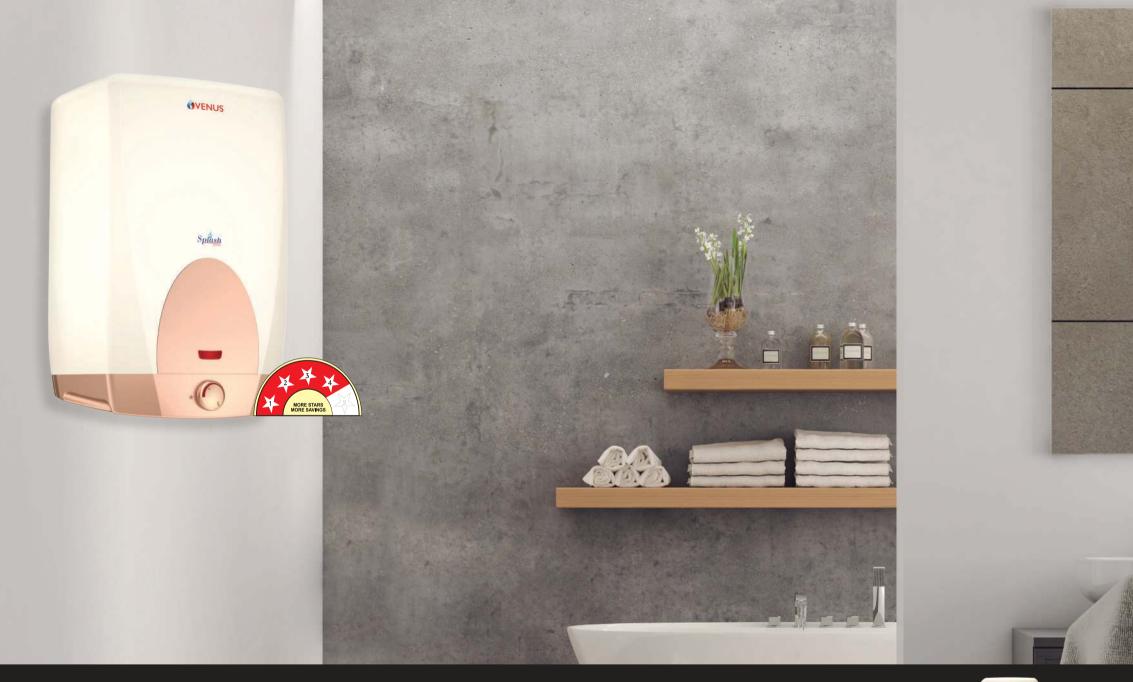



Splash Copper

Copper

Splash Copper

Splash copper is built to last. Made with sturdy & 100% copper parts - copper tank and heavy gauge copper heating element which guarantees corrosion proof performance for ages. A completely reliable water heater, Splash Copper provides you years of trouble free performance.



Copper Tank + Element



100% pure copper tank: For long life and corrosion free performance. Heavy Gauge, Ribbed for extra strength.



Super Heavy Gauge Copper Element



Hard Water Protection



Thick Polyurethane Foam (PUF) Insulation



Sacrificial Magnesium Anode for Corrosion protection



10 Years guarantee : on Copper tank




Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout




Guarantee on inner tank

Model	Wattage	Capacity	Time to Raise	Dime	Dimensions (in mm)		
		in Litres	Temp by 35°C	Α	в	с	
			Vertical	A	В		
10CU	2000	10	I3min	350	316	316	
I5CU	2000	15	20min	475	316	325	
25CU	2000	25	33min	520	366	380	

*Specifications subject to change without prior notice.

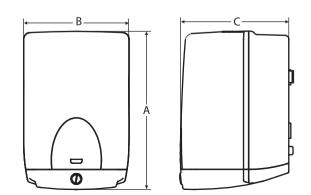



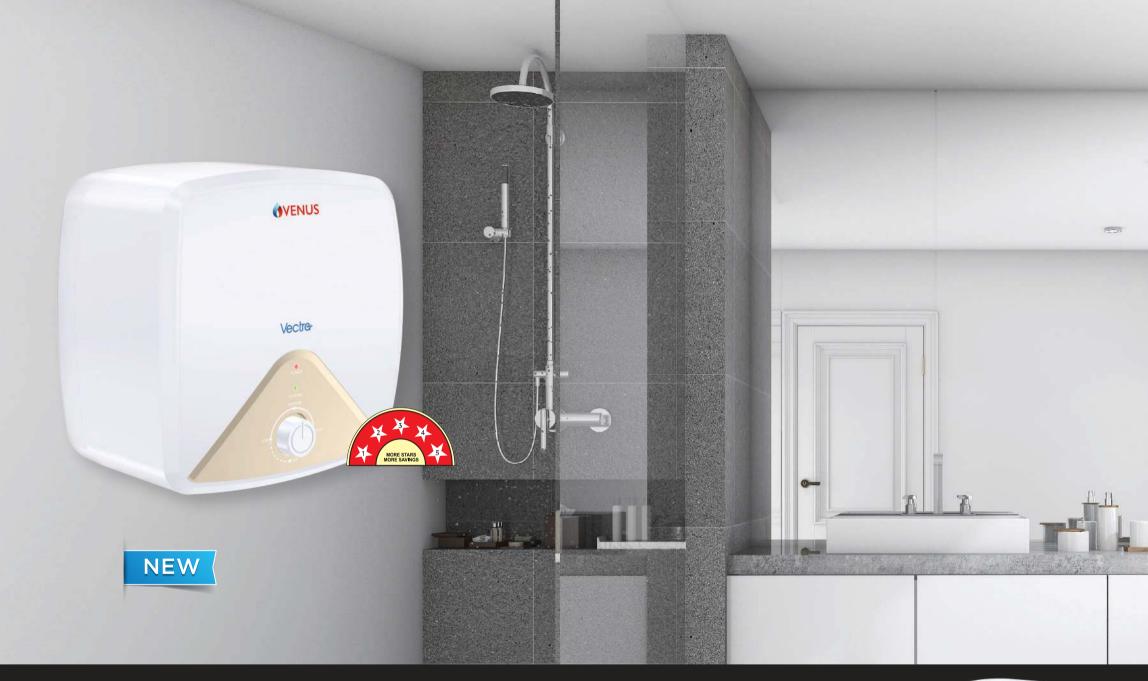



Silver Sparkle

Vectra

Vectra

Introducing VECTRA, a matchless beauty with one of its kind square design and convenient INSTA COLOR PANELS (Sunset Gold and Designer Black) that matches the elegance of your bathroom interiors. Optimum performance with Porcelain Enamel Glasslined tank, this beauty gives long life and lower energy consumption. This unique model comes with a 3.5cm PUF insulation ensuring better heat retention



Compact Form: Square design - The Unique square design adds a class of elegance for the bathroom interiors



Insta Color Panels (Swap) : Insta color panels with attractive two colors (Sunset Gold and Designer Black) which is given free inside the box adding charm to your bathroom interiors





Porcelain Enamel Glass Lined Tank



Glasslined Incoloy Element



3.5cm Thick Polyurethane Foam (PUF) Insulation



Sacrificial Magnesium Anode for Corrosion protection




Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Disc Thermal cutout



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Model	Wattage	Capacity in Litres	Time to Raise Temp by 35°C	Dime	Dimensions (in mm	
			Vertical	Α	в	с
10VS	2000	10	13min	374	374	288
I5VS	2000	15	20min	410	410	315
25VS	2000	25	33min	460	460	372

*Specifications subject to change without prior notice.

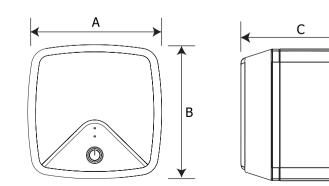

GU	ARANTI	EE
	Heating Element	Product
7 Years	2 Years	2 Years





Lyra



Introducing the all new Lyra - the ultimate water heater for the new generation. A sleek new design that will suit your modern bathroom interiors and smart indicator with color changing LED rings (Blue for heating and Red for ready to use) gives you the ease and Convenience !!!







Glass lined Incoloy element



Thick Polyurethane Foam (PUF) Insulation



Sacrificial Magnesium Anode for Corrosion protection



Hard Water Protection




Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout

8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Model	Wattage	Capacity	Time to Raise	Dime	Dimensions (in mm)		
		in Litres	Temp by 35°C	Α	в	с	
			Vertical		5		
IOR	2000	10	I 3min	367	325	325	
I5R	2000	15	20min	470	325	325	
25R	2000	25	33min	530	377	374	

*Specifications subject to change without prior notice.

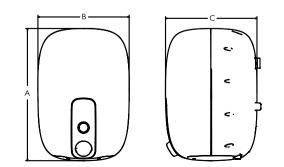









Rustic Gold

Sliver Slate

Sedra



Introducing Sedra Storage water heaters, built to withstand the test of time and provide you with reliable warmth and comfort. From the robust outer shell to the internal components, every aspect of our water heaters is engineered for longevity. Sedra water heaters are built tough for the long haul and have been constructed to resist corrosion.



Glasslined Double Ceramic Heating Elements Shock-proof, hard water proof, long-lasting (All vertical & except 6SV model).





Porcelain Enamel Glass Lined Tank



3.5cm Thick Polyurethane Foam (PUF) Insulation





Temperature Display : The display will show the real time temperature.



Plastic Outer Body : Corrosion free. Shock proof.

Scale Guard Technology



Sacrificial Magnesium Anode for Corrosion protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout




8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Product Specifications*

WATTAGE	CAPACITY	PACITY TIME TO RAISE DIMENSIONS (in mm)				n)
WATTAGE	IN LITRES	TEMP BY 35°C	Α	В	С	D
		VERTICAL				
3000	6	6min	308	337	-	201
2000	10	13min	381	337	-	201
2000	15	20min	496	337	-	201
	2000	WATTAGE IN LITRES 3000 6 2000 10	IN LITRES TEMP BY 35°C VERTICAL VERTICAL 3000 6 6min 2000 10 13min	WATTAGE IN LITRES TEMP BY 35°C A IN LITRES VERTICAL 3000 6 6min 308 2000 10 13min 381	WATTAGE IN LITRES TEMP BY 35°C A B IN LITRES VERTICAL	WATTAGE IN LITRES TEMP BY 35°C A B C IN LITRES VERTICAL -

Rated Pressure: 8 bars(kg/cm²; max, 80m water head)

*Specifications subject to change without prior notice. *Copper Heating Element in 6SB Model.

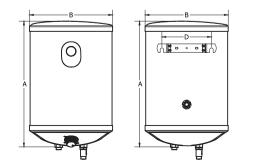



* 2 Years Guarantee on Copper Heating Element.





Sliver Sparkle

Magma Plus

Magma Plus

Magma plus have been built to last and designed to be hard water proof with scale guard technology. An updated and pleasing design with colors in metallic finish lends this model a new grace and charm to blend with your bathroom decor.



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



Glasslined Double Ceramic Heating Elements with Scale Guard Technology



Glasslined Incoloy Element (Horizontal Models only)



Temperature Display : The display will show the real time temperature.



Hard Water Protection




3cm Thick Polyurethane Foam (PUF) Insulation



3

Shock-proof Design : PP Plastic in Lids and outer body



Flexi Mount (Only for Horizontal)





Scale Guard Technology



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Model	Wattage	Capacity	Time To Raise	D	imensio	ns (in mr	n)
Hoder	••allage	In Litres	Temp By 35°c	Α	В	С	D
			VERTICAL				
025GV	2000	25	33min	545	363	-	201
035GV	2000	35	45min	680	363	-	201
050GV	2000	50	64min	590	453	200	201
070GV	3000	70	60min	765	453	367	201
100GV	3000	100	85min	1005	453	609	201
150GV	3000	150	I22min	l 455	453	1009	201
			Horizontal				
010GH	2000	10	I3min	390	313	145	201
015GH	2000	15	20min	505	313	160	201
025GH	2000	25	33min	665	313	317	201
035GH	2000	35	45min	680	363	277	201
050GH	2000	50	64min	890	363	474	201
070GH	3000	70	60min	765	453	367	201
100GH	3000	100	85min	1005	453	609	201
I50GH	3000	150	I 22min	I 455	453	1009	201





*Specifications subject to change without prior notice. *Copper Heating Element in 10GH models.







Celo Smart

White

Celo Smart

The Stylish designed water heater with a combination of safety, efficiency and technology ensures energy efficient performance. The versatile water heater with the smart Indicator digital display & color changing LED rings makes you ready to enjoy a hot shower !!!



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



Heat Retention Technology : No Thermal Bridge between the Tank and the external Housing, thereby enabling 16% lower Thermal Losses.



Digital Display : For visual indication of temperature.



Glasslined Incoloy Element



3cm Thick Polyurethane Foam (PUF) Insulation



Temperature Display : The display will show the real time temperature.



Sacrificial Magnesium Anode for Corrosion protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout

8 bar pressure: Suitable for pressure pumps and multi-storey buildings.




Blue for Heating

Model	Wattage	Capacity in Litres	Time to Raise Temp by 35°C	Di	mension	s (in mn	ו)
			Vertical	A	В	с	D
010CVD	2000	10	13min	385	321	-	201
015CVD	2000	15	20min	475	321	-	201
025CVD	2000	25	33min	530	371	-	201
050CVD	2000	50	64min	875	371	474	201
Rated Pre	Rated Pressure: 8 bars (8kg/cm ² : max. 80m water head)						

*Specifications subject to change without prior notice.



Red for Ready to use

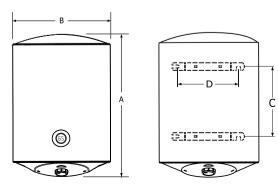







Celo



Celo the most versatile water heaters is energy efficient in performance with a stylish design. Safety, efficiency and technology combined in one water heater.



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



Heat Retention Technology : No Thermal Bridge between the Tank and the external Housing, thereby enabling 16% lower Thermal Losses.



Glasslined Incoloy Element



3cm Thick Polyurethane Foam (PUF) Insulation



Temperature Display : The display will show the real time temperature.



Sacrificial Magnesium Anode for Corrosion protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout




8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Model	Wattage	Capacity in Litres	Time to Raise Temp by 35°C	Di	mension	ıs (in mn	n)
			Vertical	Α	В	с	D
006CV	3000	6	6min	295	32 I	-	201
010CV	2000	10	I3min	385	32 I	-	201
015CV	2000	15	20min	475	32 I	-	201
025CV	2000	25	33min	530	37 I	-	201
035CV	2000	35	45min	667	37 I	-	201
050CV	2000	50	64min	875	37 I	474	201
			Horizontal				
015CH	2000	15	20min	475	321	160	201
025CH	2000	25	33min	655	32 I	317	201
050CH	2000	50	64min	875	371	474	201
Rated Pre	ssure: 8 bars (8kg/cm² ; max,	80m water head)				

*Specifications subject to change without prior notice.

**Copper Heating Element 2 Years Guarantee for 6CV model.

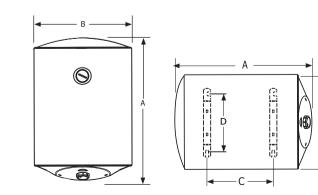

GU	ARANTI	ΞE
Inner Tank	Heating Element 2 Years	Product
7 Years	2 Years	2 Years



Slim Series



White

Slim Series

Introducing Slim series water heater. With only 12" Diameter it is ideal for fixing above false ceilings and in bathrooms with low ceilings.



Slim design with 12" diameter: It can be easily concealed inside a false ceiling or fixed in the smallest space.



Rustproof ABS Lids: With Aesthetic Design and Stylish bottom inspection cover.



Porcelain Enamel Glass Lined Tank



Glasslined Incoloy Element



Thick Polyurethane Foam (PUF) Insulation



Sacrificial Magnesium Anode for Corrosion protection





Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout

8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Model	Wattage	Capacity in Litres	Time to Raise Temp by 35°C	Dimensions (in		s (in mn	ו)		
			Vertical	A	В	с	D		
010HS	2000	10	18min	355	305	145	201		
015HS	2000	15	20min	475	305	192	201		
025HS	2000	25	33min	645	305	365	201		
Rated Pressure: 8 bars (8kg/cm² ; max, 80m water head)									

*Specifications subject to change without prior notice.

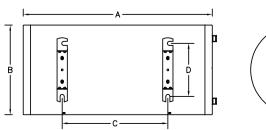







Quik Tankless



Quik Tankless

Get hot water in no time with QUIK Tankless water heaters designed with a unique heat exchanger technology for an instant relaxing shower every day this water heater also has an advanced microprocessor control for constant temperature output.



Tankless Heat Exchanger Technology: The heating element and water pipe are molded together for quick transfer of heat from element to the water without contact. This ensures quick heating, long life and safety.



Digital Temperature Display: The set and actual temperature are prominently displayed.



Flow Based Operation



Over heat Protection



Constant temperature output



Earth Leakage Protection



ABS Outer Body : Corrosion free. Shock proof.




Q55/Q68


K⊂ ►


۷

6 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Quik		Q55	Q68	Q90	Q123	Q153	Q183	Q243	QU55	QU75	
Wattage		5500 W	6800 W	9000 W	12000 W	15000 W	18000 W	24000 W	5500 W	7500 W	
Rated Voltage		2	220-240 V, 50Hz, AC			400 V, 50/60Hz 3Phase, AC				220-230V,50/60Hz, AC	
Wiring Size		3 x 2.5mm²	x 2.5mm ² 3 x 4mm ² 3 x 6 mm ²		4 x 2.5 mm ²	4 x 2.5 mm ²	4 x 4 mm ²	4 x 6 mm ²	3 x 2.5 mm ²	3 x 4 mm ²	
Required Rating of Circuit Breaker		32 amps	40 amps	50 amps	25 amps	25 amps	32 amps	40 amps	32 amps	40 amps	
Rated Pressure			0.02 – 0.6 Mpa								
Safety Class		IP25									
Temp.Setting range			30°C - 55°C 30°C - 60°C 30°C-50°C					30°C-50°C	30°C-55°C		
Rate of flow			1.5 - 10 L/	'min	1.8 - 12 L/min				1.5 - 10 L/min		
Temperature	5 L/min	I6°C	19°C	26°C	-	-		-	I6°C	21°C	
Raise (Δt) @	7 L/min	II℃	I4°C	18°C	25°C	31°C	37°C	49°C	II°C	18°C	
	10 L/min	8°C	10°C	I3°C	17°C	21°C	26°C	34°C	8°C	11°C	
	12 L/min	-	-	-	I4°C	18°C	21°C	29°C	-	-	
Dimensions (mm)	A	310 338		338	385				170	380	
	В	2	210	211	260				220	225	
	С	7	′0	72	90			55	80		














Sunshine Gold

French Violet


Brizo

Brizo Plus / Brizo

Brizo Plus / Brizo offers an effective, space-efficient, and user-friendly answer to hot water requirements. Utilizing precise temperature management and continuous supply, Brizo Plus stands as a fitting selection for modern homes, apartments, and businesses. With Brizo Plus, users can experience instant hot water, concurrently curbing energy wastage and elevating convenience

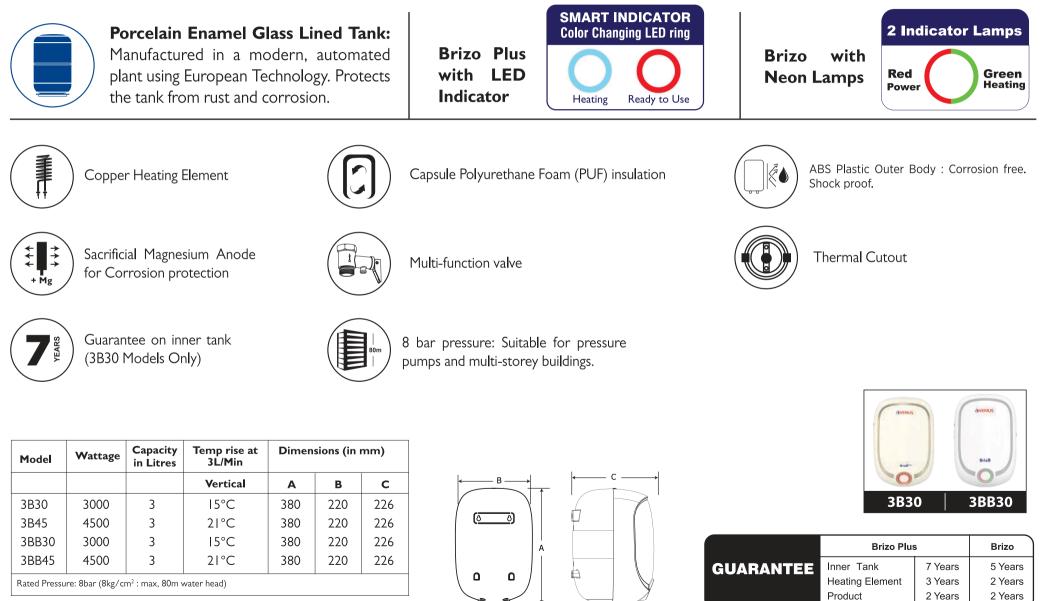

*Specifications subject to change without prior notice.

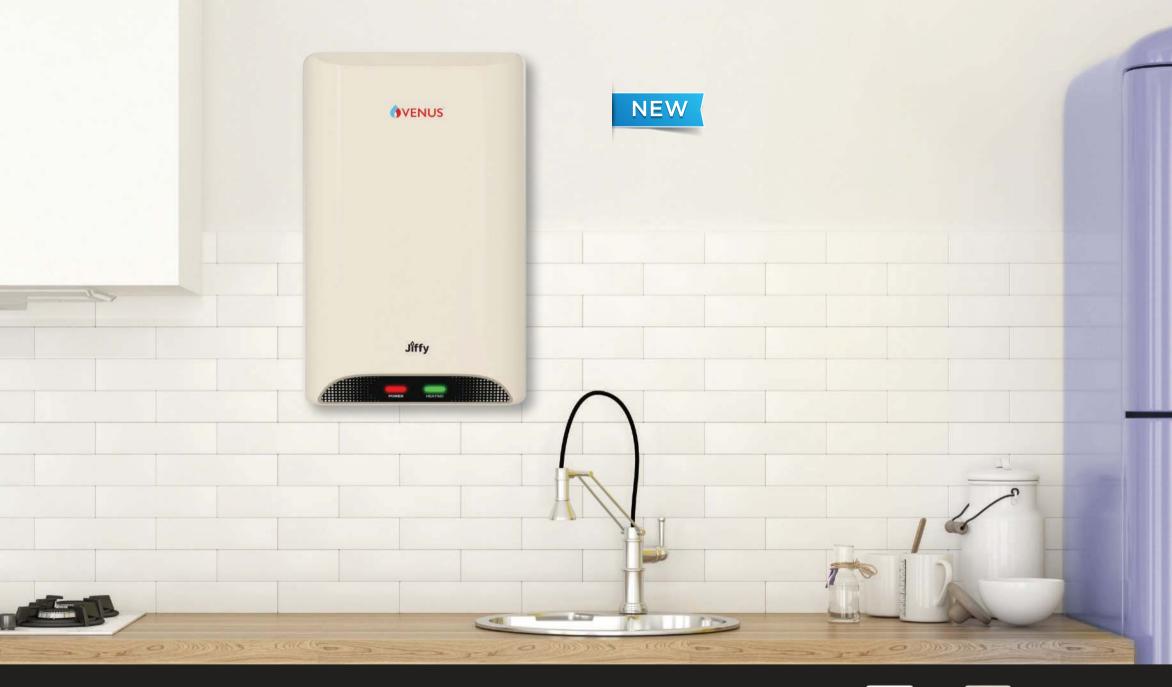

Jiffy





lvory



Introducing Jiffy, the best water heater. This stylish instant beauty is most suited for the modern and stylish interiors.



Hi-grade SS 304L Inner Tank : Stainless Steel for corrosion free performance.

Stem Thermostat : Senses water temperature quickly and precisely protect against over heating safety function.



Copper Heating Element



Indicator Lamps : Two LED's - Green for Heating & Red for Power



Plastic Outer Body : Corrosion free. Shock proof.



Stem Thermal Cutout



Pressure Release Valve : Prevents build up of excessive pressure inside tank.




6 Bar Pressure: High Working pressure that is double that of ordinary Instant water heaters.

Product Specifications

Model	Capacity in Ltrs	Wattage	Temp rise at	Dimensions in mm					
			3L/Min	Α	В	С			
J45	I	4500	21 °C	280	189	158			
3J30	3	3000	17 °C	320	207	176			
3J45	3	4500	24 °C	320	207	176			
Rated Pressure : 6 bars (6 kg/cm2; max, 60 m water head)									

Specifications subject to change without prior notice

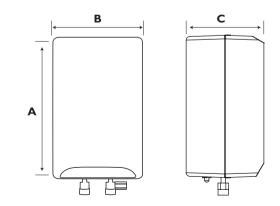







Lava



Need hot water at the flick of a switch!!! Get hot water in an instant!!! The indicator lamps (green for heating and red for power) makes it convenient for use.



100% pure copper tank: For long life and corrosion free performance. Has single, high quality weld joints.



Thermal Cutout : Backup safety device cuts off power at 100°C. Prevents overheating.



Copper Heating Element



Capsule Polyurethane Foam (PUF) insulation



ABS Outer Body : Corrosion free. Shock proof.



Red - Power , Green - Heating



Multi-function valve




6 Bar Pressure: High Working pressure that is double that of ordinary instant water heaters.

Model	Wattage	Capacity in Litres	Temp to Raise	Dimensions (in mm)				
	**attage		at 3L/Min	Α	В	С	D	
			Lava Instant					
3L30	3000	3	I7°C	353	248	188	87	
3L45	4500	3	24°C	353	248	188	87	

SESS SE IST Rated Hessare, obla (org) en Thiax, oon water

*Specifications subject to change without prior notice.







Heat Pump





Commercial Heat Pump

All in One Heat Pump

Heat Pump Swimming Pool

Domestic Heat Pump

Venus introduces Heat Pump Water Heaters in India. Using renewable energy heat sources from the ambient air to heat water, these heaters can provide hot water round-the-clock and throughout the year in an energy-efficient and affordable way. Venus Heat Pump Water Heaters are the right solution for domestic hot water applications. Get non-stop hot water anywhere in the house while saving as much as 75-80% on your heating costs. A solitary heat pump installed anywhere in the house can supply hot water to all the bathrooms and kitchens.

PRODUCT SPECIFICATIONS

Description			VDF	IX3i	VDH	X5i	VD	HX8i			
Rated Heating capacity		kW	3	.5	5.0)	7.5				
		BTU/h	119	940	170	60	25	590			
	Inlet Water Temp.15°C		7	5	11	0	16	60			
Rated Hot Water	Inlet Water Temp.20°C	L/h	85		12	125		35			
Output	Inlet Water Temp.25°C	L /11	100		14	145		5			
•	Inlet Water Temp.30°C		12	20	17	2	26	60			
Rated Heating power input		kW	0.83		1.1	9	1.79				
Operating C	Current	А	3.8 5.4		8.2						
Power supp	bly	V/PH/Hz	220~240V / 1PH / 50~60Hz								
COP		W/W	4.2								
Rated output	ut water temperature	°C	55								
Max outlet v	water temp	С°			6	0					
Compressor type			Rotary × 1								
Water side heat exchanger		Туре	Tube - Tube								
Dimension (A x B x C)		mm	930 x 360 x 550 930 x 3			0 x 550	930 x 360 x 550				
Noise level		dB(A)	≤43dB(A) ≤48dB(A) ≤52dB(A)					B(A)			
Fan discharging		Туре	Horizontal								
Ambient temperature		°C	(-)7~43								
Refrigerant	Refrigerant		R410A								
Water conn	lection		3/4"								
Cabinet			Powder Coated								
		Liter	100-300 500			0	1000				
Suggested water tank		Inner Tank	Porcelain Enamel Glass Lined Tank			Epoxy coated / SS					
Net weight		kg	40		45		54				
Gross weight		kg	45 50			60					
Guarantee (Heat Pump)			2 years								
Guarantee (Tank)			5 years				1 year				
Tank dimension		100 Lts 200 Lts 300 Lts 500 Lts	D 510 560 650	E 1000 1385 1520	D - - 710	E - - 2000	D - - -	E - - - -			
			-	-	-	-	1050	2000			

Testing condition - Heating: Ambient temp. (DB/WB): 20°C/15°C, water temp. (input/output): 15°C/55°C. * Conditions apply.



Tank

COP of 4.2





Compressor





more savings






Split system for


flexible installation



controller







Go Green With **OVENUS**

Environmental Friendly Initiatives

Venus Water heaters and innovation goes hand in hand. To add the feather in the crown venus has taken certain initiatives which are environment friendly. A Major move to move away from Thermocol packaging has been in process for quite a few years and the alternate solutions have been innovative on that front. The use of molded pulp buffers in domestic and export water heaters and Ceiling Fans, corrugated buffer (made of kraft paper) replacing instapack buffer, Column airbags (which is bio-degradable and at the same time recyclable) for Instant Water heaters and 6 Ltr Storage Models Our Water heaters have CFC/HCFC Free Insulation that has low global warming potential and Zero Ozone depletion potential. This ensures no damage to the ozone layer and minimum impact on global warming.



Low Global Warming

Environmental friendly PUF insulation material which are highly efficient and have impressively low GWP (Global warming potential)compared to traditional insulation materials thereby actively contributing to reduced greenhouse gas emissions & mitigating climate change







Ozone Friendly Insulation

Using polyol and isocyante in the production of polyurethane foam (PUF). Our PUF has zero ozone depletion potential (ODP), which ensures it does not harm the ozone layer



VENUS

OVENU


O Sela

VENUS

sedró

New Generation Packaging


In our efforts to contribute positively to the environment, we have completely revamped our packaging solutions. We've transitioned away from conventional materials such as Thermocole (EPS) and have instead adopted a new range of eco-friendly alternatives. Our innovative packaging choices now include Moulded Pulp Buffer, InstaPack Buffer, Corrugated Buffer, and Column Airbag.







Model Selection Guide

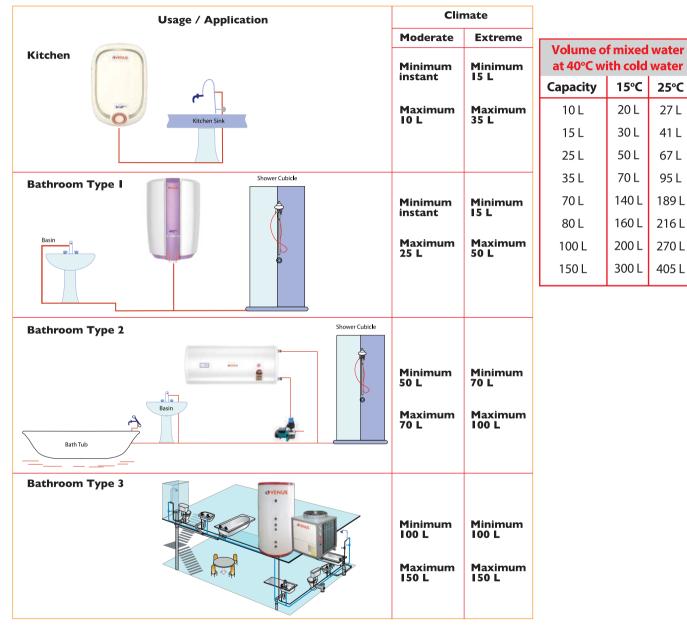

A Service that's full of warmth

Venus designs its products to meet demanding national and international standards. You can be sure that this drive for quality is matched by the customer satisfaction record that our after sales service strives for. "Service within 24 hours" is the promise of our committed service personnel. With more than 310+ service centers throughout the country, prompt, economical and reliable service will reach you, wherever you are.







Nationwide

Service

For service with warmth Call Customer Care

Service in Genuine 24 hours spare parts

Ø 08144666999

+91-9884064999

Note :

1. Assuming usage is by 1-2 persons.

For more number of people, option for the next higher size.

WATER HEATERS

VENUS HOME APPLIANCES (P) LTD.

CENTRAL MARKETING OFFICE: 4/993, Kamaraj Street, Rajiv Gandhi Salai (OMR), Kottivakkam, Perungudi Post, Chennai - 600 096.

